


Technische Fiche: HVSB2BH249

Novobit FTTH 24x9 OS2 CPR B2ca

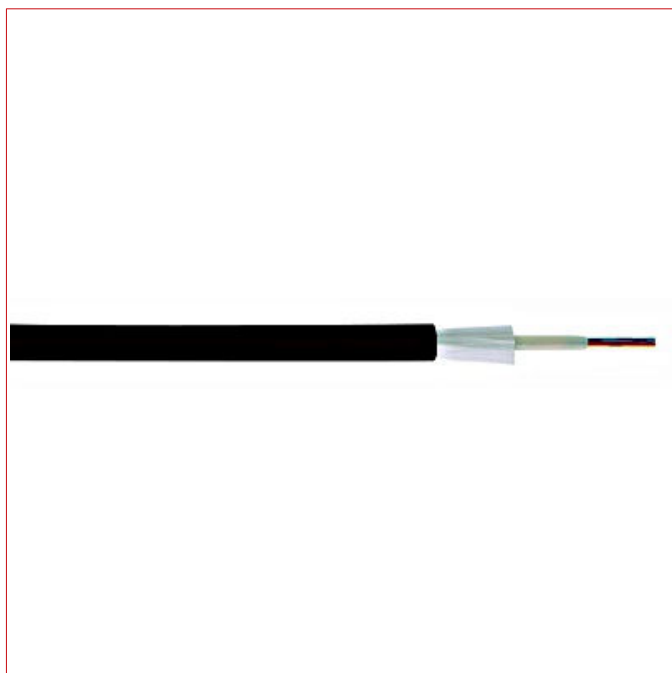

Technische gegevens

Aantal glasvezels	24
Netto diameter (mm)	10,00
Diameter - Centrale buis (mm)	2,8
Nettogewicht (kg)	0,22
Gebruik	Universele kabel
Bescherming knaagdieren	Ja
Drukvastheid (N/m)	2670
Kabelmantel	PE (Outdoor)
Halogeenvrij	Neen
Buigradius kabel - Statisch (Ø)	104
Buigradius kabel - Dynamisch (Ø)	208
Cable Max. Crush Resistance Operation (longterm) (N/m)	800
Cable Max. Crush Resistance Installation (shortterm) (N/m)	2670
Ethernet bandbreedte 1GB (m)	Ano
Ethernet bandbreedte 10GB (m)	Ano
Type vezels	9/125µm OS2 singlemode
Materiaal buitenisolatie	Polyethyleen (PE) Polyethyleen (PE Outdoor)

Omschrijving	Referentie
Novobit FTTH 24x9 OS2 CPR B2ca	HVSB2BH249