


Technische Fiche: IL433245-A

# Zählerverteiler Einsatz 2-45M, 6 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

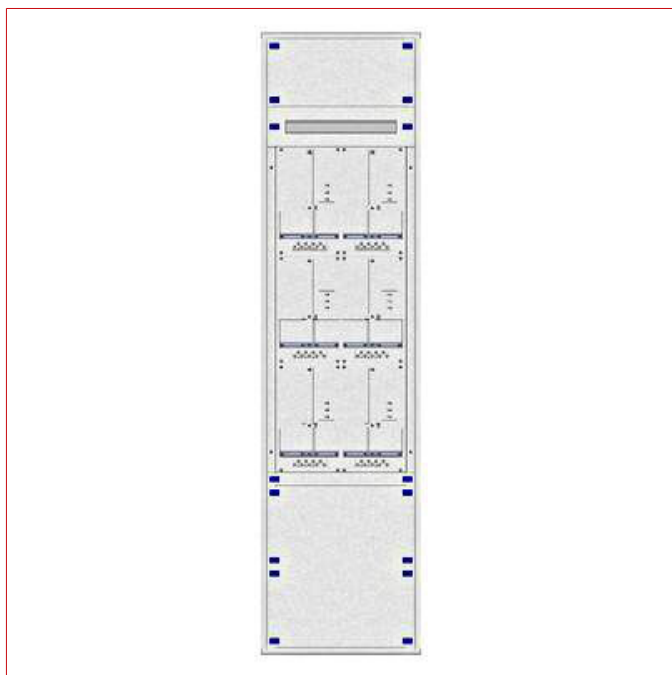

## Technische gegevens

|                  |                    |
|------------------|--------------------|
| Breedte (mm)     | 500,00             |
| Hoogte (mm)      | 2.070,00           |
| Diepte (mm)      | 150,00             |
| EAN CODE         | 9004840967180      |
| Product          | Tellerverdeelinzet |
| Provincie        | Tirol              |
| Chassisdelen     | Frontplaten staal  |
| Afwerking        | RAL 7035           |
| Breedte kast     | 2                  |
| Hoogte eenheden  | 45                 |
| Aantal rijen     | 3                  |
| Tellerplaatsen   | 6                  |
| Secundaire rijen | 1                  |
| Omschrijving     | Inzet              |

## Artikelen

| Omschrijving                                                                                                                                                                                                                                                                                                                                                   | Kopergewicht (kg/km) | Referentie |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------|
| Zählerverteiler Einsatz 2-45M, 6 Zählerplätze, Tirol<br>Frontblende Stahlblech, komplett                                                                                                                                                                                                                                                                       |                      | IL433245-A |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                                                                                                                    |                      |            |
| Aardingsverbinding 300mm 6mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                      |                      | IL900099   |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                      | IL900189   |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                      | IL900189-A |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                      | IL900190   |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                      | IL900191   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                  | IL901816   |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                 | IL901820   |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                 | IL901824   |