


Technische Fiche: IL993328--

## Flush-m. enclosure 3U-28 prewired for Carinthia, K3 RAL9016

Bestückt mit: 1x FI 40A 3+N 30mA GA, 1x FI 40A 3+N 30mA A, 3x LSS C16/1, 10x LSS C13/1N, 5x LSS C16/1N, 1x LSS C16/3N, 1x N-Durchführung 16A, 1x ÜA T2, 1x Tylan 25A, 1x HKL 4x25mm<sup>2</sup>, 1x Zähleranschlussklemme, 1x Stromstoßschalter, RAL9016

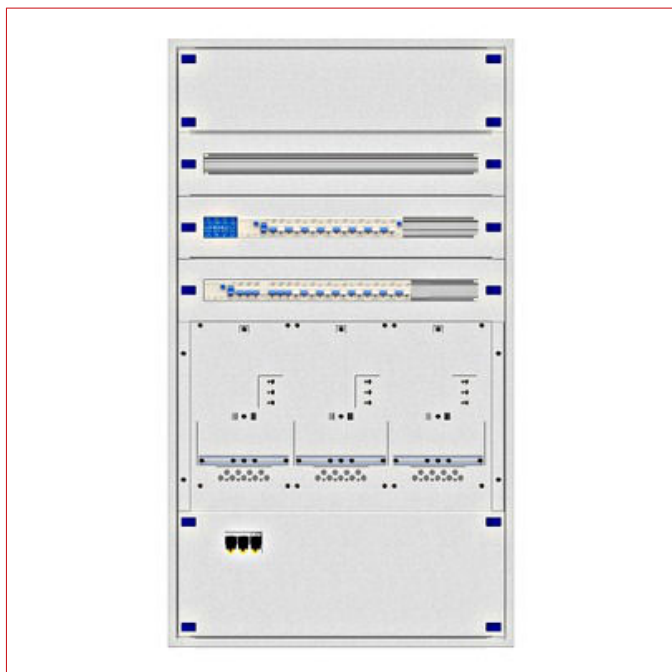

### Technische gegevens

|                           |               |
|---------------------------|---------------|
| Breedte (mm)              | 810,00        |
| Hoogte (mm)               | 1.380,00      |
| Diepte (mm)               | 250,00        |
| EAN CODE                  | 9004840691931 |
| Stroomwarmteverliezen (W) | -395,00       |
| Bevestiging               | Inbouwmontage |
| Afwerking                 | RAL 9016      |
| Hoogte (mm)               | 1380          |
| Omschrijving              | Kast          |

| Omschrijving                                                                                                                                                                                                                                                                                                 | Referentie |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Flush-m. enclosure 3U-28 prewired for Carinthia, K3 RAL9016<br>Bestückt mit: 1x FI 40A 3+N 30mA GA, 1x FI 40A 3+N 30mA A, 3x LSS C16/1, 10x LSS C13/1N, 5x LSS C16/1N, 1x LSS C16/3N, 1x N-Durchführung 16A, 1x ÜA T2, 1x Tylan 25A, 1x HKL 4x25mm², 1x Zähleranschlussklemme, 1x Stromstoßschalter, RAL9016 | IL993328   |