

Technische Fiche: KT208030--

Compact enclosure 1 door IP65 H=2000 W=800 D=300 mm

sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle



SCHRACK-Info

- **Material** : Corpus: 1.5 mm galvanised sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear panel: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
 - two-part bottom plate at depth 300 mm
 - three-part bottom plate at depths 400 and 500 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Roof panel** : Removable


- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP65 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Enclosure with door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure



Technische gegevens

Breedte (mm)	800,00
Hoogte (mm)	2.000,00
Diepte (mm)	300,00
Nettogewicht (kg)	124,00
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	70
Deur dikte (mm)	1,50
Montageplaat hoogte (mm)	1888
Uitvoering	Plaatstaal
Afwerking	RAL 7035
Bodemplaten aantal	2
Draagvermogen per deur (kg)	50
Aantal deuren	1
Hoogte (mm)	2000
Diepte (mm)	300
Beschermingsgraad	IP65
Montageplaat dikte (mm)	3
Beschermingsklasse	I
Kast plaatdikte (mm)	1,50
Montageplaat	Plaatstaal gegalvaniseerd
Breedte bodemplaat (mm)	555
Montageplaat breedte (mm)	688
Breedte (mm)	800
Optionele toebehoren	IU006519CZ;ATSOC104--;ATSOC204--;ATSOT031--;ATSOB081--;A CLE9301--;ASDRA400--;BK14004--B;BK14005--A;IL14035-- A;IL14037---
Product	Compact kast
Draagvermogen totaal (kg)	1200
Draagvermogen montageplaat (kg)	500
Stroomwarmteverliezen (W)	-704,00

Maattekening: Compact enclosure 1 door IP65 H=2000 W=800 D=300 mm

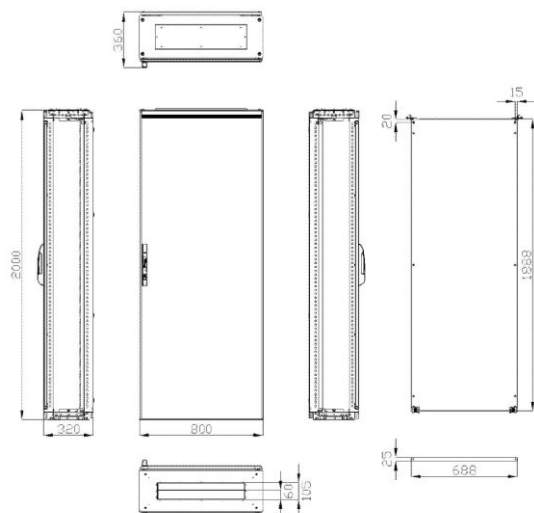

Artikelen

Omschrijving	Referentie
Compact enclosure 1 door IP65 H=2000 W=800 D=300 mm	KT208030
sheet steel, RAL7035, with mounting plate, four-point rod lock with push-pull handle	
Optionele toebehoren	
LED ligh for EC, infra	IU006519CZ
WSA Sokkel 4 hoeken H=100mm ABS RAL7012	ATSOC104
Set 4 hoeken, panelen breedtedelen en dieptedelen zijn apart te bestellen	
WSA Sokkel 4 hoeken H=200mm ABS RAL7012	ATSOC204
Set 4 hoeken, panelen breedtedelen en dieptedelen zijn apart te bestellen	
WSA Sokkel 2 dieptepanelen DxH 300x100mm RAL7012	ATSOT031
Set 2 panelen dieptedelen, hoeken en breedtedelen zijn apart te bestellen	
WSA Sokkel 2 breedtedelen BxH 800x100mm RAL7012	ATSOB081
Set van 2 breedte panelen, de hoeken en dieptedelen zijn apart te bestellen	
AC Hijsogen verzinkt M12 (set 4stk.)	ACLE9301
Planhouder A4 zelfklevend of schroefbevestiging	ASDRA400
HxBxD 235x264x33mm	
DIN-rail TS35 gegalvaniseerd 3000x35x7,5mm	BK14004--B
De opgegeven prijs is per stuk.	
DIN-rail TS35 geperforeerd gegalvaniseerd 2000x35x7,5mm	BK14005--A
De opgegeven prijs is per stuk.	
DIN-rail TS35 gegalvaniseerd 2000x35x15mm	IL14035--A
De opgegeven prijs is per stuk.	

Artikelen

Omschrijving	Referentie
Optionele toebehoren	
DIN-rail TS35 geperforeerd gegalvaniseerd 2000x35x15mm	IL14037
De opgegeven prijs is per stuk.	