

Technische Fiche: LID17444--

Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° wit

Recessed downlight, Compleet met driver



Productinformatie

CCT Variable 30W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms. Supplied with 800mA non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.


Technische gegevens

Hoogte (mm)	22,00
Netto diameter (mm)	295,00
Type verlichting	Inbouw plafondverlichting
Afwerking	Wit
Uitvoering	Acryl Aluminium gegoten
Afdekkingen	Acryl
Stralingshoek (°)	120
Voedingen	LED Driver
Nominale werkspanning AC (V)	220-240
Ingangsspanning AC (V)	220-240
Bedrijfsstroom mA (mA)	800
Primaire stroom (A)	0,80

Technische gegevens - vervolg

Lampvoet	LED
Lichtrendement (lm/W)	110
Vermogen (W)	30
Lichtkleur	Koudwit Warmwit Neutraalwit
Kleurtemperatuur (K)	4000 3000 5700
Kleurweergave-index (Ra)	≥80
Lichtstroom (lm)	3300
Levensduur	36.000h / L70 / B50
Regelen lichtintensiteit	Neen
Beschermingsklasse	II
Beschermingsgraad	IP20
Inbouw diepte (mm)	50
Lichtmiddel inbegrepen	Inbegrepen
Diameter (mm)	295
ØxH (mm)	295x22
Boring voor inbouw (mm)	Ø 285
Uitsnijding (mm)	Ø 285

Maattekening: Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° wit

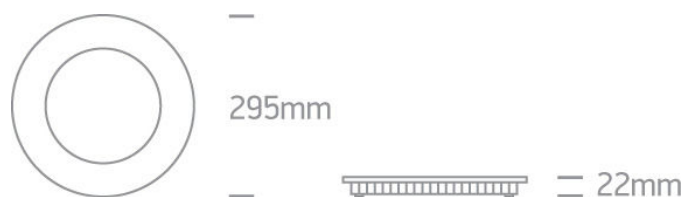

Omschrijving	Referentie
Sutil Round2 LED 30W 3300lm 3K/4K/5,7K IP20 230V 120° wit	LID17444
Recessed downlight, Compleet met driver	