

Technische Fiche: MAIM5200B-

# LED blinking light module, 230-240VAC, green

Base required, Productgroep Knipperen, Bouwvorm Module, Bediening Constant, Nominale spanning 230VAC- 240VACV




## Technische gegevens

|                       |                                             |
|-----------------------|---------------------------------------------|
| Productgamma          | MA 230V                                     |
| Productgroep          | Knipperen                                   |
| LED-Kleur             | Groen                                       |
| Nominale spanning (V) | 230VAC- 240VAC                              |
| Bouwvorm              | Module                                      |
| Bediening             | Constant                                    |
| Beschermingsgraad     | IP66                                        |
| Diameter (mm)         | 70                                          |
| Invoeringen           | Afhankelijk van basis                       |
| Optionele toebehoren  | MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100-- |
| Type lamp             | LED                                         |
| Lens                  | Polycarbonaat, Fresnel lens                 |
| Bevestiging           | Vrije oriëntatie                            |

## Technische gegevens - vervolg

|                                   |                     |
|-----------------------------------|---------------------|
| Levensduur                        | 100000              |
| Temperatuursbereik - Werking (°C) | -30°C tot +60       |
| Slagvastheid                      | IK08                |
| Nominale stroom (A)               | 0,03                |
| Knipper frequentie (Hz)           | 2                   |
| Maximum aantal modules            | 5                   |
| Inbouwdiameter (mm)               | 70                  |
| Inschakelduur (%ID)               | 100                 |
| Lekstroom                         | 3mA [bruikbaar PLC] |

## Dimension

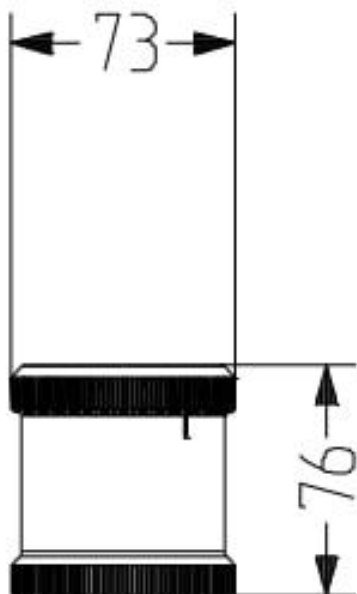

## Artikelen

| Omschrijving                                                                                                                                                                                                   | Referentie |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| LED blinking light module, 230-240VAC, green                                                                                                                                                                   | MAIM5200B  |
| Base required, Productgroep Knipperen, Bouwvorm Module, Bediening Constant, Nominale spanning 230VAC- 240VACV                                                                                                  |            |
| <b>Optionele toebehoren</b>                                                                                                                                                                                    |            |
| Standard Base for Signal Towers modular, Black                                                                                                                                                                 | MAIB0001   |
| 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC),<br>Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen                       |            |
| Vertical Base for Signal Towers modular, Black                                                                                                                                                                 | MAIB0002   |
| 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC),<br>Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen                       |            |
| Tube base for Signal Towers,Alu-tube with plastic foot,100mm                                                                                                                                                   | MAIR0001   |
| 1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Productgroep Toebehoren, Bouwvorm Lege sokkel, Type klemmen Veerklemmen |            |
| Multi-tone siren, 8 tones, 24V AC/DC                                                                                                                                                                           | MAIA3100   |
| Base required, only mountable as top modul, Productgroep Multi-toon, Bouwvorm Module, Bediening Dip schakelaars, Nominale spanning 24VAC/DCV                                                                   |            |