

Technische Fiche: NCS4FWW14C

# Security luminaire SECURO 24 PRO S4 3W LED 24V DC

White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision  
- centrally switchable, 318lm




## Technische gegevens

|                           |                    |
|---------------------------|--------------------|
| Breedte (mm)              | 192,00             |
| Hoogte (mm)               | 220,00             |
| Diepte (mm)               | 65,00              |
| Nettogewicht (kg)         | 1,12               |
| Type verlichting          | Noodverlichting    |
| Type batterijvoeding      | Centrale batterij  |
| Type toestel              | SECURO 24 PRO      |
| Productgroep              | Verlichting metaal |
| Design                    | S4                 |
| Afwerking                 | Wit                |
| Lichtmiddel               | HP-LED (3W)        |
| Lumen                     | 314                |
| Nominale stroom (mA) (mA) | 180                |

## Technische gegevens - vervolg

|                                |                                          |
|--------------------------------|------------------------------------------|
| Nominale spanning (V)          | 24VDC                                    |
| Beschermingsgraad              | IP65                                     |
| Bevestiging                    | Plafondmontage<br>Plafondinbouw mogelijk |
| Omgevingstemperatuur min. (°C) | -25                                      |
| Omgevingstemperatuur max. (°C) | 50                                       |
| AA Klasse E 8101               | AA4                                      |
| Leverancier                    | Schrack                                  |

## Maattekening: Security luminaire SECURO 24 PRO S4 3W LED 24V DC

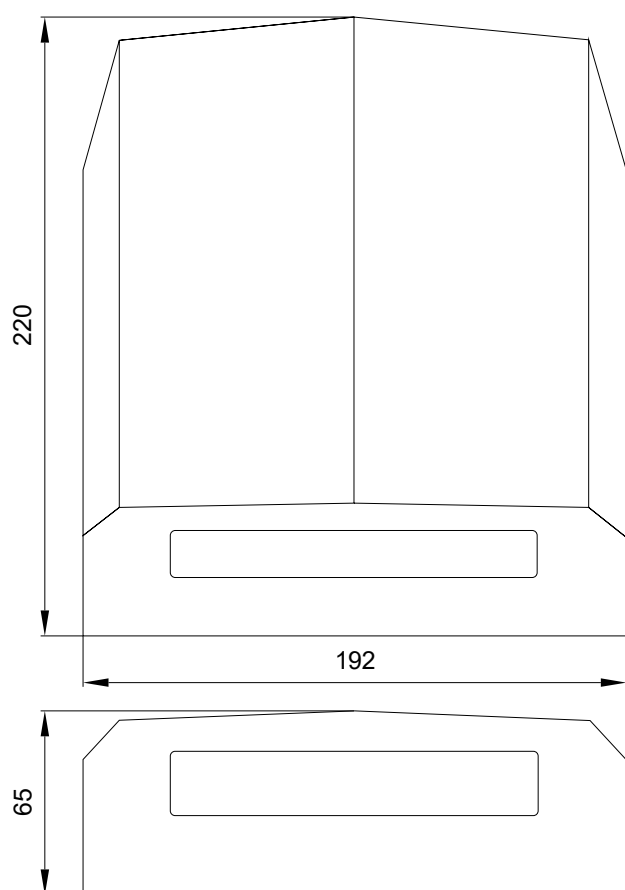

## Artikelen

| Omschrijving                                                                                                                                                                                                                                                                                                                                                                                      | Referentie |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Security luminaire SECURO 24 PRO S4 3W LED 24V DC<br>White, IP65, -25° up to +50°C, LED 3W, wall surface mounting, with single lamp supervision - centrally switchable, 318lm                                                                                                                                                                                                                     | NCS4FWW14C |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                                                                                                                                                       |            |
| Low Power Supply 24V DC SECURO 24 PRO cab. M 6/20 w. batt.<br>6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:<br>1h: 18A, 3h: 8A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet M (for 2 x 45Ah): H534 x<br>W475 x D186mm, incl. 2 pcs 45Ah OGiV batteries (NLBA045)  | NCCB2461ES |
| Low Power Supply 24V DC SECURO 24 PRO cab. L 6/20 w. batt.<br>6 circuits, max. 120 luminaires (20 luminaires per circuit), max. current per circuit: 3A, max. total load current in emergency mode:<br>1h: 18A, 3h: 18A, total max. 10A for maintained luminaires, with single luminaire monitoring, cabinet L (for 4 x 45Ah): H754 x<br>W475 x D186mm, incl. 4 pcs 45Ah OGiV batteries (NLBA045) | NCCB2463ES |