

EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC

transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm




Technische gegevens

Netto lengte (mm)	356,00
Hoogte (mm)	175,00
Diepte (mm)	76,00
Nettogewicht (kg)	2,00
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Standaard
Type toestel	Noodverlichting Ex
Design	EXIT
Afwerking	Grijs
Lichtmiddel	LED (3W)
Lumen	106
Nominale spanning (V)	110VAC- 277VAC/ 110VDC- 250VDC
Beschermingsgraad	IP66
Bevestiging	Wandaanbouw
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

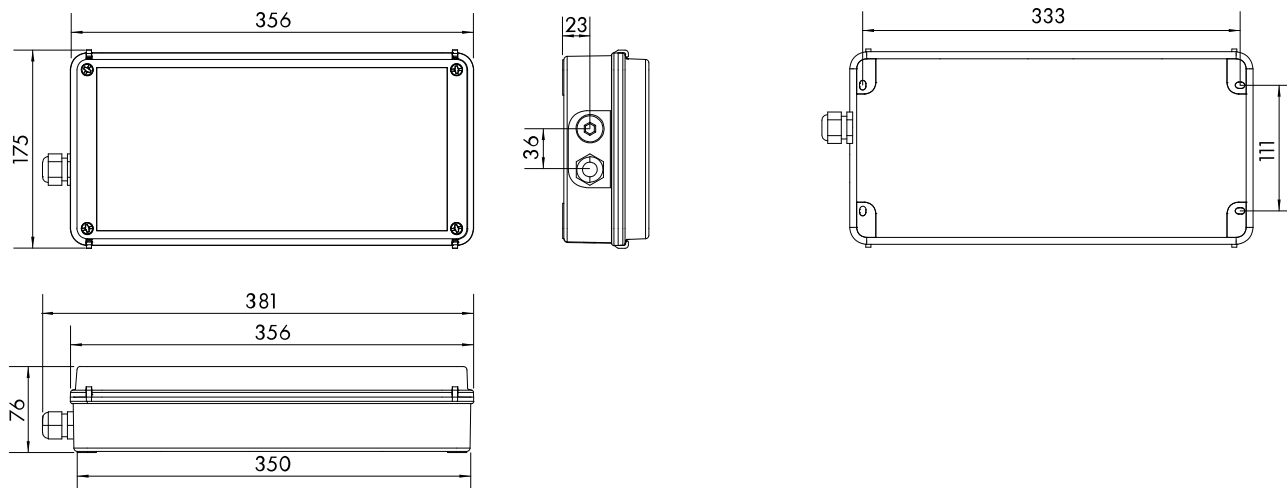

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

Artikelen

Omschrijving	Referentie
EX-protected emerg.luminaire EXIT 2 zone2/22 LED 230V AC/DC transparent cover without pictogram, for CPS and LPS, wall surface mounting, IP66, 106lm	NL93000004
Optionele toebehoren	
Manager noodverlichting bewaking en gemengde werking 4-200VA	NLMU05
Manager noodverlichting in behuizing 176x125x82 mm (LxHxD)	NLMU05BOX