

Technische Fiche: NLEERRG29E

Emergency luminaire EE 1x1W ERT-LED 230V AC/DC radial illum.


White, with round cover, ceiling recessed mounting with adapterframe in switch box Ø68mm (Boxes with minimum installation depth 61mm recommended), security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m , with supervision - centrally switchable



Technische gegevens

Hoogte (mm)	54,00
Netto diameter (mm)	88,00
Nettogewicht (kg)	0,16
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Verlichting metaal
Design	EE
Afwerking	Wit
Lichtmiddel	ERT-LED (1W)
Lumen	140
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP20
Bevestiging	Plafondinbouw
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4

Dimensions (mm) NLEER.G29M

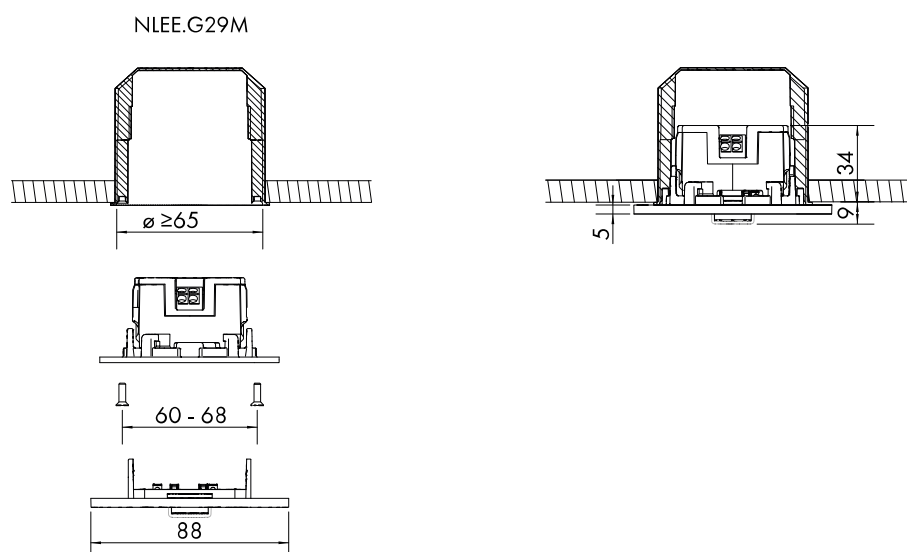

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,76	9,62	9,63	9,64	3,76
2,50	1,06	9,67	9,74	10,04	1,11
3,00	0,00	8,00	8,00	8,07	0,00

Artikelen

Omschrijving	Referentie
Emergency luminaire EE 1x1W ERT-LED 230V AC/DC radial illum. White, with round cover, ceiling recessed mounting with adapterframe in switch box Ø68mm (Boxes with minimum installation depth 61mm recommended), security luminaire to illuminate areas with a luminaire distance of 10m at a mounting high of 2,5m , with supervision - centrally switchable	NLEERRG29E
Optionele toebehoren	
EE Sierafdekking noodverlichting vierkant wit	NLEEQWS
EE Sierafdekking noodverlichting vierkant wit	
EE Sierafdekking noodverlichting vierkant antraciet	NLEEQAZ
EE Sierafdekking noodverlichting vierkant antraciet	
EE Sierafdekking noodverlichting rond antraciet	NLEERAZ
EE Sierafdekking noodverlichting rond antraciet	