

Emergency luminaire IL 1x3W ERT-LED 230V white

White, recessed ceiling mounting, emergency luminaire with changeable lenses, including lenses for illuminating escape routes or for illuminating round recessed, 360lm




Technische gegevens

Hoogte (mm)	90,00
Netto diameter (mm)	122,00
Nettogewicht (kg)	0,35
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Kunststof verlichting
Design	IL
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	RAL 9003
Lichtmiddel	ERT-LED (3W)
Lumen	360
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%


Technische gegevens - vervolg

Continu vermogen (W)	4,60
Standby vermogen (W)	1,20
Maximaal vermogen (W)	4,60
Beschermingsgraad	IP20
Slagvastheid	≥ IK03
Bevestiging	Plafondinbouw
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen NLILE... (mm)

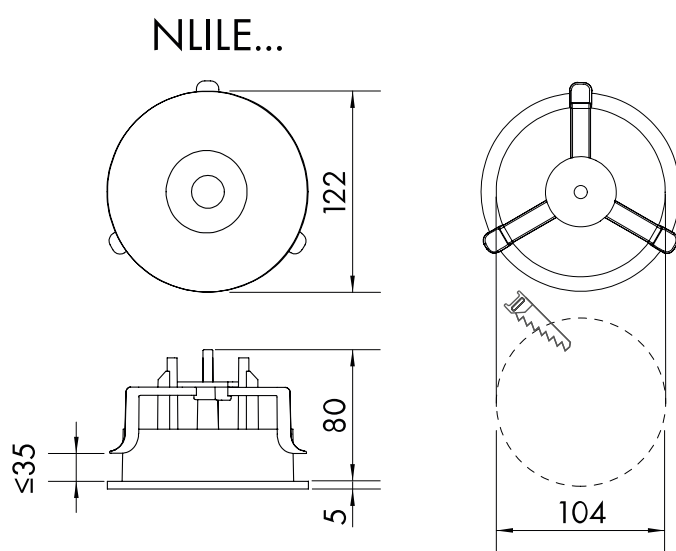

Wall illumination 5 lux for safety devices with beam lens (NLLSYSB4 - to be ordered separately) - Maintenance factor 0.8

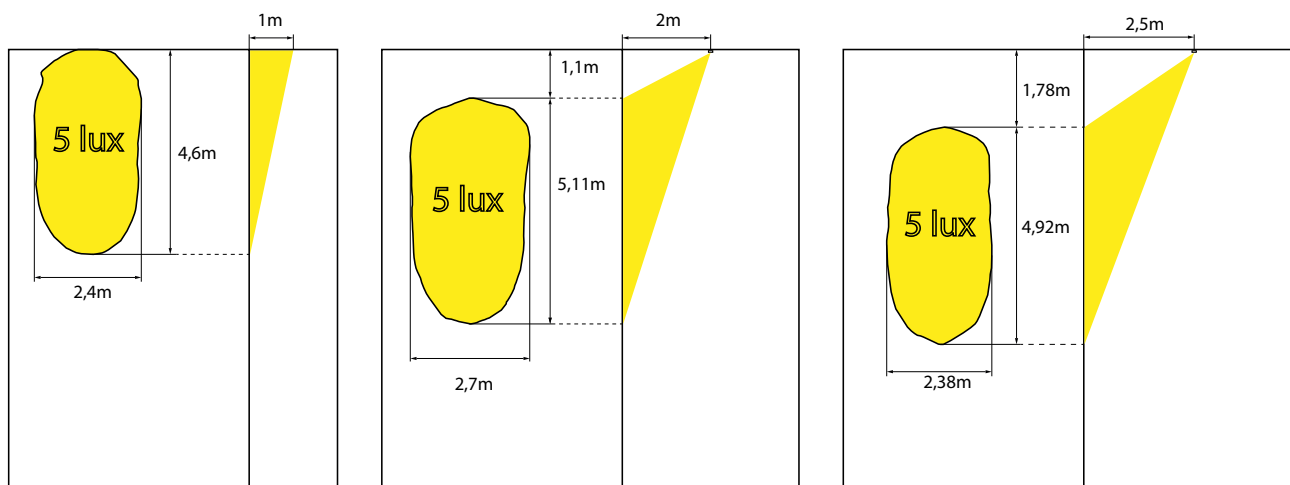

Abstandstabelle mit Korridorlinsen (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	2,87	7,78	12,06	16,21	7,12
2,50	2,99	8,08	13,42	18,77	8,26
3,00	3,03	8,31	14,72	21,08	9,29
3,50	3,01	8,53	16,01	23,34	10,15
4,00	2,99	8,65	17,06	25,46	10,91
5,00	2,93	8,60	18,74	29,02	12,04
6,00	2,29	8,57	14,93	27,82	3,58

Abstandstabelle Runde-Linse (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	4,10	8,72	8,72	8,72	4,10
2,50	4,93	10,54	10,54	10,54	4,93
3,00	5,70	12,22	12,22	12,22	5,70
3,50	6,31	13,87	13,87	13,87	6,31
4,00	6,71	15,43	15,43	15,43	6,71
5,00	0,95	13,16	13,16	13,16	0,95

Abstandstabelle Spot-Linse (NLLSYSS4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,21	4,96	4,96	4,96	2,21
3,00	2,60	5,87	5,87	5,87	2,60
3,50	2,86	6,57	6,57	6,57	2,86
4,00	3,16	7,17	7,17	7,17	3,16
5,00	3,64	8,23	8,23	8,23	3,64
6,00	4,05	9,36	9,36	9,36	4,05
7,00	4,43	10,30	10,30	10,30	4,43
8,00	4,71	11,08	11,08	11,08	4,71
9,00	4,90	11,93	11,93	11,93	4,90
10,00	5,00	12,64	12,64	12,64	5,00
12,00	4,95	13,67	13,67	13,67	4,95
14,00	4,58	14,17	14,17	14,17	4,58
16,00	3,83	14,20	14,20	14,20	3,83

Abstandstabelle Hohe-Flur-Linse (NLLSYSH4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8

					
2,00	1,68	4,18	7,30	10,44	4,57
2,50	2,10	5,23	9,07	12,74	5,50
3,00	2,23	5,70	10,00	14,31	6,07
3,50	1,91	6,05	10,83	15,72	6,55
4,00	1,77	6,30	11,50	16,99	6,97
5,00	1,80	5,52	12,33	18,93	7,63
6,00	2,00	5,19	12,71	20,54	8,06
7,00	2,12	5,06	13,01	21,83	8,25
8,00	2,16	5,49	13,29	22,90	8,28
9,00	2,23	5,81	13,37	23,42	8,20
10,00	2,26	6,02	13,34	23,75	8,00
12,00	2,11	6,22	13,02	23,76	7,16
14,00	1,75	6,39	12,13	23,12	5,63
16,00	0,44	6,20	10,25	21,78	0,00

Artikelen

Omschrijving	Referentie
Emergency luminaire IL 1x3W ERT-LED 230V white	
White, recessed ceiling mounting, emergency luminaire with changeable lenses, including lenses for illuminating escape routes or for NLILEL029E illuminating round recesseds, 360lm	
Optionele toebehoren	
Vervanglens LED noodverlichting symmetrisch (4 stuk)	NLLSYSR4
Vervanglens LED noodverlichting symmetrisch (4 stuk)	
Vervanglens LED noodverlichting gangverlichting (4 stuk)	NLLSYSF4
Vervanglens LED noodverlichting gangverlichting (4 stuk)	
Vervanglens noodverlichting spot verlichting (4 stuk)	NLLSYSS4
Voor verlichting van lokalen met hoge plafonds	
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	NLLSYSB4
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	
Vervanglens LED gangverlichting plafonds >4m (4 stuk)	NLLSYSH4
Vervanglens LED noodverlichting gangverlichting (4 stuk)	
Gereedschap om inbouwnoodverlichting NLILE te openen	NLILTOOL
Klokboor snijdiepte 36mm Ø105mm zonder snelspanner	GI63290105
Ball protection plexiglas lxwxh=190x190x62mm, for IL/EA	NLBALLPLX4
Thickness 5mm, recommended for NLIL.. surface mounted	
Korf balbescherming IL/ KI/ VI/ RI/ KT/ DAQ/ DAR	NLBALL3
XL 150 Installation housing - with short trafo tunnel	GTDP870
order matching front additionally	
Front part mineral fibre board for XL150 Installationhousing	GTDP874