

Technische Fiche: NLKMU403WL

Emergency luminaire KM WirelessControl LED 3h 230V AC, white

Universal mounting, with 4x0,5W High Power LED, with LiFePO₄ battery, exit sign luminaire, viewing distance: 24m



Technische gegevens


Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	174,00
Nettogewicht (kg)	0,60
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Kunststof verlichting
Design	KM
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	RAL 9003
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010

Technische gegevens - vervolg


Detectie afstand (m)	24
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emergency luminaire KM WirelessControl LED 3h 230V AC, white


NLKM...

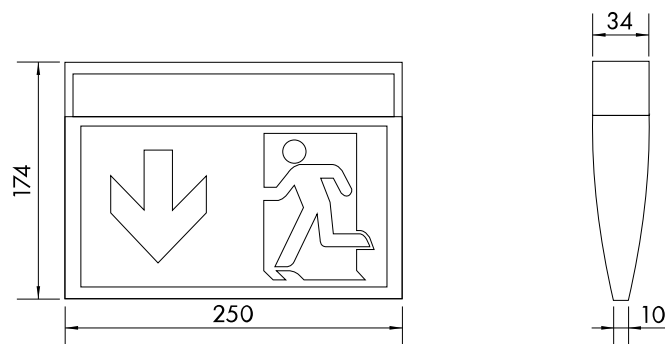

NLKME

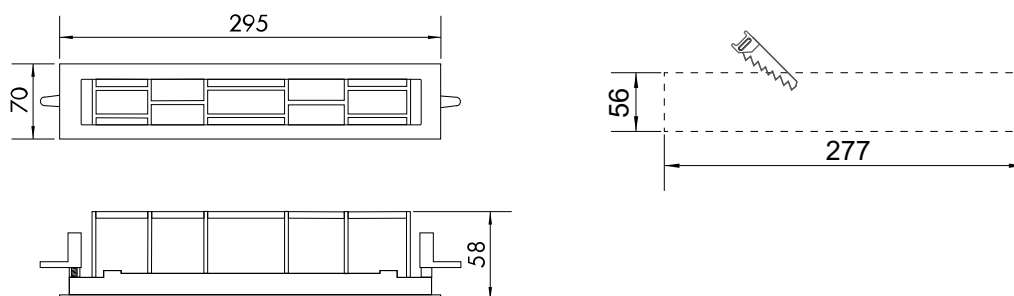

Maattekening: Emergency luminaire KM WirelessControl LED 3h 230V AC, white

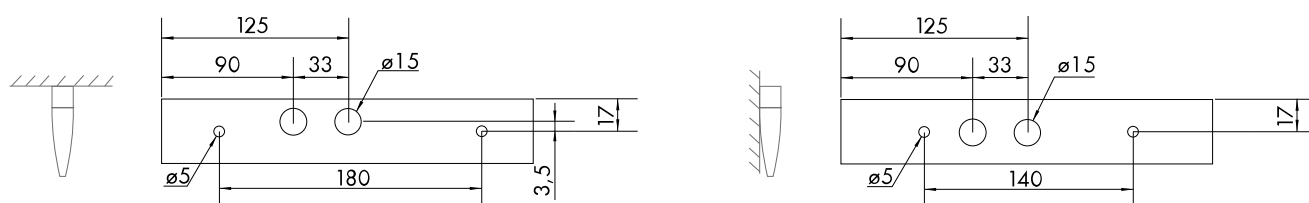

Artikelen

Omschrijving	Referentie
Emergency luminaire KM WirelessControl LED 3h 230V AC, white Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, exit sign luminaire, viewing distance: 24m	NLKMU403WL
Optionele toebehoren	
KM, KMB, KS Inbouwkader noodarmatuur wit Uitsnijding plafond: 275x54mm	NLKME
KM/KS Haakse wandbeugel wit	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pendelophanging noodverlichting 500mm bedrading wit Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Korf balbescherming KD/ KM/ KS/ LM	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4