

Technische Fiche: NLKSCS403W

Emergency luminaire KS WirelessControl LED

3h 230V AC, black

Universal mounting, with LiFePO₄ battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm




Technische gegevens

Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	174,00
Nettogewicht (kg)	0,60
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl Professional
Productgroep	Ring licht Kunststof verlichting
Design	KS
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	RAL 9005


Technische gegevens - vervolg

Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	190
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

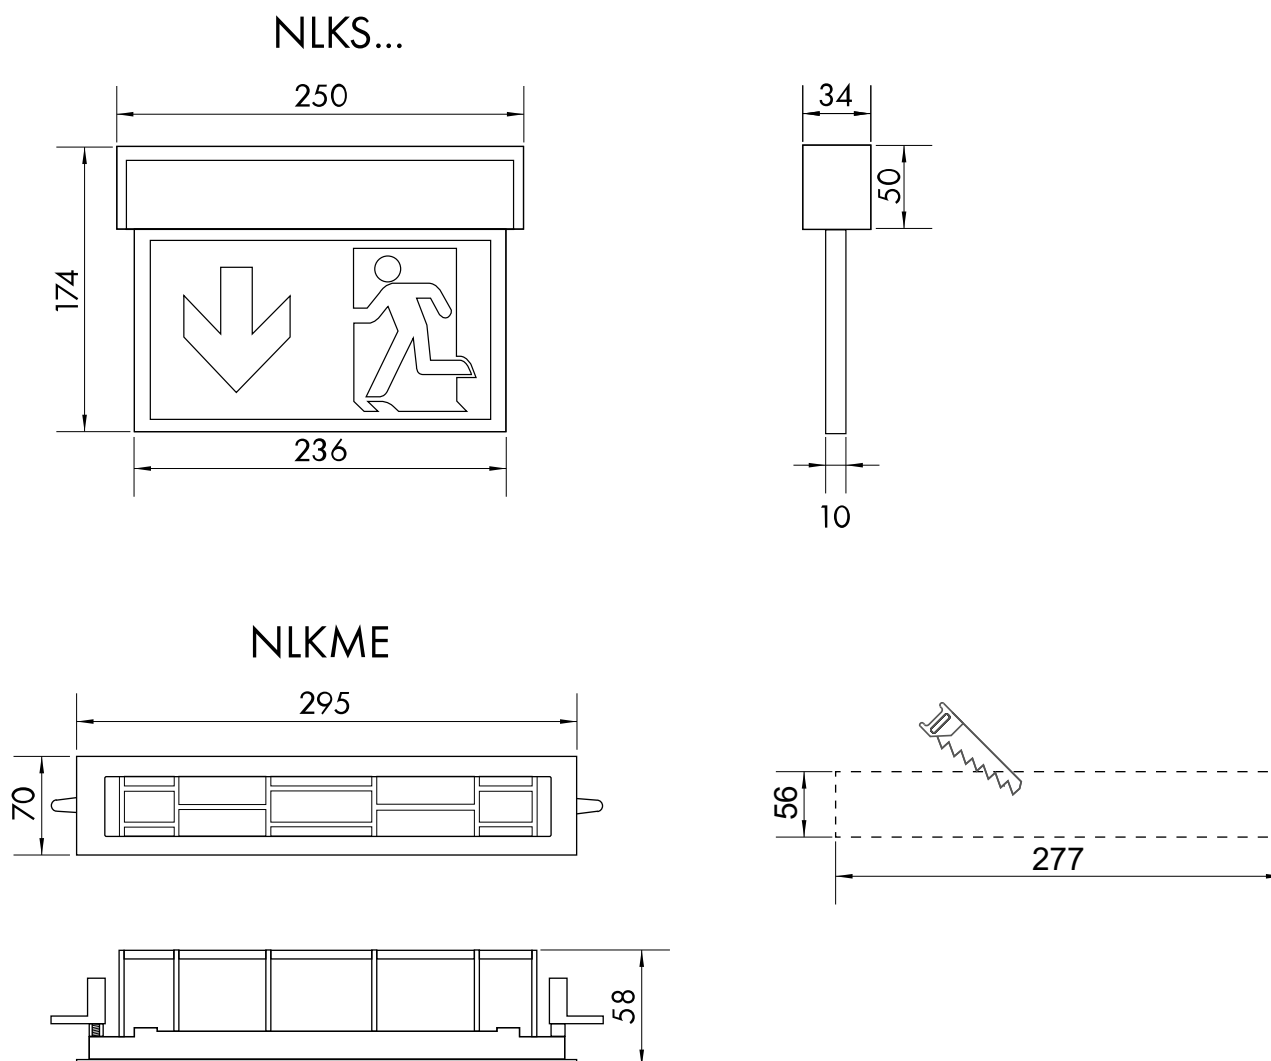

Maattekening: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

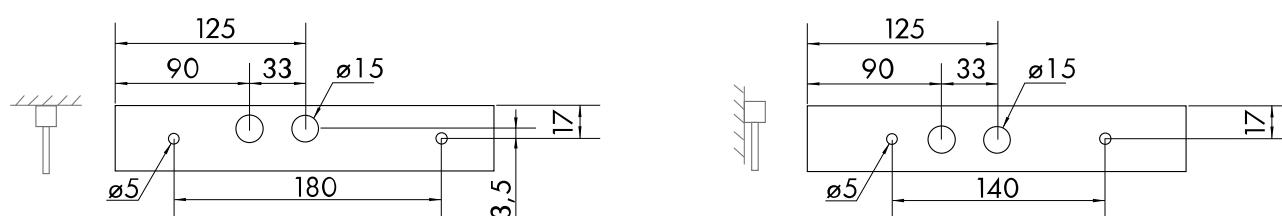

Gegevens tabel: Emergency luminaire KS WirelessControl LED 3h 230V AC, black

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Artikelen

Omschrijving	Referentie
Emergency luminaire KS WirelessControl LED 3h 230V AC, black	
Universal mounting, with LiFePO4 battery, with 4x0,5W High Power LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm	NLKSCS403W
Optionele toebehoren	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphat battery, UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRU
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen	NLKS4FIRE
Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	
KS, AM, KB Pictogrammen eerste hulp	NLKS4HELP
Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	
KM/KS Haakse wandbeugel wit	NLAWKSU
Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Pendelophanging noodverlichting 500mm bedrading wit	
Korf balbescherming KD/ KM/ KS/ LM	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4