

Emergency luminaire KS WirelessControl LED

3h 230V AC TT

White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, LiFePO₄ battery suitable for low temperatures -25° to 40°C



Technische gegevens


Netto lengte (mm)	250,00
Breedte (mm)	34,00
Hoogte (mm)	174,00
Nettogewicht (kg)	0,60
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl lage temperatuur
Productgroep	Ring licht Kunststof verlichting
Design	KS
Halogeenvrij	Behuizing van halogeenvrij kunststof

Technische gegevens - vervolg



Afwerking	RAL 9003
Pictogrammen	Set pictogrammen (pijl links, rechts, onder, boven en folie wit) conform ISO 7010
Detectie afstand (m)	22
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	190
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,0Ah
Beschermingsgraad	IP54
Slagvastheid	$\geq$ IK03
Bevestiging	Universeel Wandbevestiging Plafondmontage Plafondinbouw mogelijk
Omgevingstemperatuur min. ($^{\circ}$ C)	-25
Omgevingstemperatuur max. ($^{\circ}$ C)	40
AA Klasse E 8101	AA3 AA4
Leverancier	Schrack

Maattekening: Emergency luminaire KS WirelessControl LED 3h 230V AC TT



NLKS...

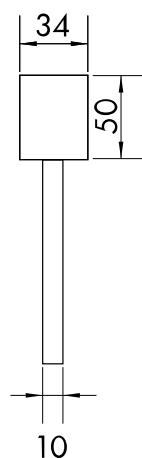

NLKME

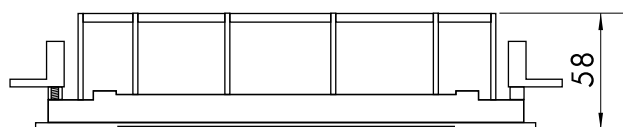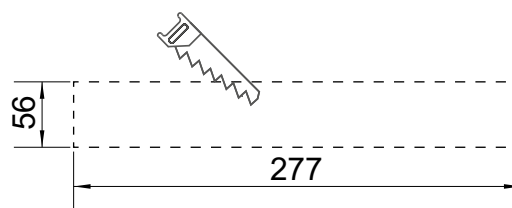

Maattekening: Emergency luminaire KS WirelessControl LED 3h 230V AC TT

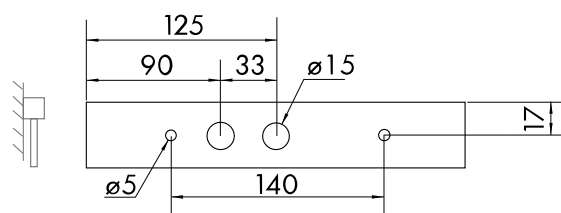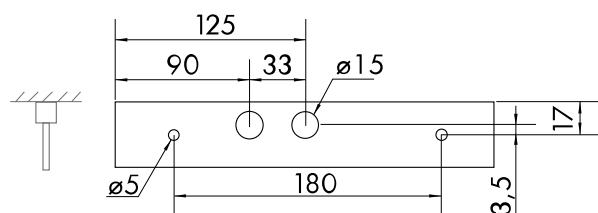

Gegevens tabel: Emergency luminaire KS WirelessControl LED 3h 230V AC TT

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Artikelen

Omschrijving	Referentie
Emergency luminaire KS WirelessControl LED 3h 230V AC TT White, Universal mounting, with 4x0,5W HP-LED, with transparent cover for additional light of the rescue path, viewing distance: 22m, 190lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKSCT403W
Optionele toebehoren	
Batterij LiFePO4 3.2V 3.3Ah lage temperatuur LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram links omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLO
Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram links omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTLU
Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omhoog noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS Pictogram rechts omlaag noodverlichting KB(KBM), KS, AM, AS	NLAMPIKTRO
KS, AM, KB Pictogrammen brandbestrijdingsmiddelen Set pictogrammen volgens ISO7010 (brandblusser, brandslang, branddetector, middelen en apparaten voor brandbestrijding)	NLKS4FIRE
KS, AM, KB Pictogrammen eerste hulp Set pictogrammen volgens ISO7010 (eerste hulp, verzamelpunt, defibrillator, nooduitgang met ladder)	NLKS4HELP
KM/KS Haakse wandbeugel wit	NLAWKSU
Pendelophanging noodverlichting 500mm bedrading wit Pendelophanging noodverlichting 500mm bedrading wit	NL2DWKMKS
Korf balbescherming KD/ KM/ KS/ LM	NLBALL1
Design kabelophanging 2000mm 1 paar 35	NLDSA000
Design koordophanging 2000mm 1 paar	NLCORD2
Design koordophanging 4000mm 1 paar	NLCORD4