

Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling

With exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP54, protection class II, 520lm




Technische gegevens

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	0,70
Type verlichting	Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en centrale bediening
Productgroep	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit
Detectie afstand (m)	16

Technische gegevens - vervolg

Lichtmiddel	ERT-LED (4W)
Lumen	520
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP54
Slagvastheid	IK06
Bevestiging	Plafondmontage
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack

Maattekening: Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling

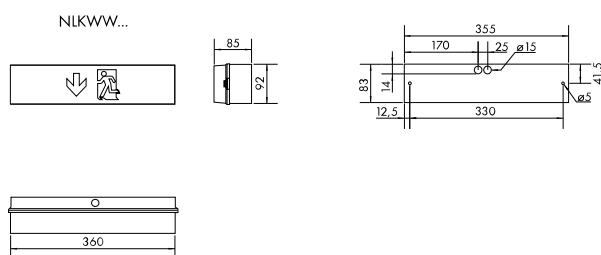

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	4,18	10,19	9,85	9,45	3,79
2,50	4,50	11,25	10,77	10,21	4,14
3,00	4,75	12,06	11,52	10,97	4,47
3,50	4,95	12,69	12,15	11,68	4,69
4,00	5,09	13,22	12,77	12,36	4,81
5,00	5,56	14,04	13,68	13,30	4,92
6,00	4,70	14,52	14,18	13,76	4,76
7,00	4,36	14,60	14,28	13,96	4,02
8,00	3,74	14,86	13,70	13,64	3,67
9,00	2,31	13,05	12,96	12,87	2,25

Abstandstabelle mit Korridorlinsen quer (im Lieferumfang enthalten) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	7,71	17,75	12,86	7,90	3,11
2,50	8,82	20,30	14,34	8,45	3,32
3,00	9,84	22,58	15,73	8,99	3,43
3,50	10,76	24,81	17,06	9,37	3,49
4,00	11,60	26,89	18,26	9,63	3,50
5,00	8,18	30,62	19,76	9,88	3,46
6,00	5,40	27,98	11,92	9,90	3,18
7,00	3,12	13,80	12,12	9,78	2,62

Abstandstabelle Runde-Linsen (NLLSYSR4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,37	9,66	9,51	9,32	4,21
2,50	5,15	11,36	11,13	10,85	4,99
3,00	5,87	12,86	12,67	12,47	5,68
3,50	6,53	14,47	14,25	14,01	6,31
4,00	7,12	15,95	15,70	15,44	6,80
5,00	7,04	18,58	18,20	17,84	5,66
6,00	1,14	15,88	15,48	15,18	1,16

Abstandstabelle Spot-Linsen (NLLSYSS4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,30	5,58	5,58	5,58	2,30
3,00	2,77	6,70	6,70	6,70	2,77
3,50	3,12	7,40	7,40	7,40	3,12
4,00	3,34	7,82	7,82	7,82	3,34
5,00	3,86	8,86	8,86	8,86	3,86
6,00	4,28	9,84	9,84	9,84	4,28
7,00	4,68	10,90	10,90	10,90	4,68
8,00	5,00	11,78	11,78	11,78	5,00
9,00	5,22	12,51	12,51	12,51	5,22
10,00	5,36	13,28	13,28	13,28	5,36
12,00	5,43	14,49	14,49	14,49	5,43
14,00	5,20	15,16	15,16	15,16	5,20
16,00	4,72	15,36	15,36	15,36	4,72

Abstandstabelle Hohe-Flur-Linsen (NLLSYSH4-- separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,68	13,09	9,59	6,03	2,24
3,00	6,62	15,30	11,10	6,86	2,51
3,50	7,18	16,77	11,90	7,04	2,48
4,00	7,66	18,12	12,61	7,11	2,42
5,00	8,48	20,40	13,74	7,00	1,92
6,00	9,14	22,30	14,06	6,22	2,02
7,00	9,62	23,92	14,58	5,46	2,14
8,00	9,84	25,28	14,98	5,58	2,16
9,00	10,02	26,46	15,24	5,88	2,25
10,00	10,16	27,24	15,36	6,08	2,28
12,00	9,00	28,11	14,91	6,24	2,22
14,00	7,92	28,20	14,36	6,52	1,96
16,00	5,72	25,96	13,16	6,48	1,40

Artikelen

Omschrijving	Referentie
Emergency luminaire KW clear 4x1W ERT-LED 230V EL, ceiling	
With exchangeable lenses, corridor lenses in scope of delivery included, with supervision - centrally switchable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, IP54, protection class II, 520lm	NLKWC039EL
Optionele toebehoren	
KW Korf balbescherming	NLBKW
KWI Pictogrammen (pijlen boven, onder, links, rechts)	
Set pictogrammen volgens ISO7010	NLKWIPKTO
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Vervanglens LED noodverlichting gangverlichting (4 stuk)	
Vervanglens LED noodverlichting gangverlichting (4 stuk)	NLLSYSF4
Vervanglens LED noodverlichting symmetrisch (4 stuk)	
Vervanglens LED noodverlichting symmetrisch (4 stuk)	NLLSYSR4
Vervanglens noodverlichting spot verlichting (4 stuk)	
Voor verlichting van lokalen met hoge plafonds	NLLSYSS4
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	NLLSYSB4