


Emerg.lum. KW clear Autotest 4x1W ERT-LED 3h 230V AC ceil.

With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery 1h: 520lm; 3h: 520lm; 8h: 200lm




Technische gegevens

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	0,80
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichtng met autotest
Type toestel	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit

Technische gegevens - vervolg

Detectie afstand (m)	16
Autonomietijd (h)	3
Lichtmiddel	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Batterij type (V/Ah)	LiFePO4 2x 3,2V/ 3,3Ah
Beschermingsgraad	IP54
Bevestiging	Plafondmontage
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emerg.lum. KW clear Autotest 4x1W ERT-LED 3h 230V AC ceil.

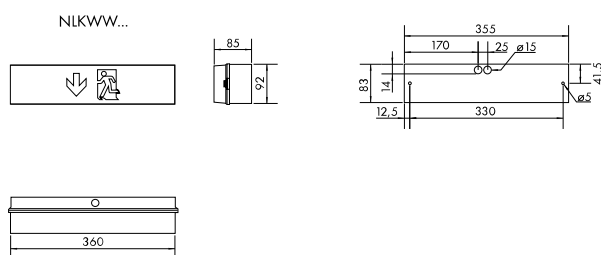

Abstandstabelle 1h, 3h Autonomie, mit Korridorlinsen quer (Werksauslieferung) - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	7,71	17,75	12,86	7,90	3,11
2,50	8,82	20,30	14,34	8,45	3,32
3,00	9,84	22,58	15,73	8,99	3,43
3,50	10,76	24,81	17,06	9,37	3,49
4,00	11,60	26,89	18,26	9,63	3,50
5,00	8,18	30,62	19,76	9,88	3,46
6,00	5,40	27,98	11,92	9,90	3,18
7,00	3,12	13,80	12,12	9,78	2,62

Abstandstabelle 1h, 3h Autonomie, ohne Linsen - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	4,18	10,19	9,85	9,45	3,79
2,50	4,50	11,25	10,77	10,21	4,14
3,00	4,75	12,06	11,52	10,97	4,47
3,50	4,95	12,69	12,15	11,68	4,69
4,00	5,09	13,22	12,77	12,36	4,81
5,00	5,56	14,04	13,68	13,30	4,92
6,00	4,70	14,52	14,18	13,76	4,76
7,00	4,36	14,60	14,28	13,96	4,02
8,00	3,74	14,86	13,70	13,64	3,76
9,00	2,31	13,05	12,96	12,87	2,25

Abstandstabelle 8h Autonomie, mit Korridorlinsen quer (Werksauslieferung) - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	6,36	14,63	10,13	5,70	2,15
2,50	7,22	16,75	11,37	5,98	2,17
3,00	2,99	18,63	12,36	6,11	2,16
3,50	3,25	16,80	8,46	6,15	1,98
4,00	3,46	15,57	7,65	6,15	1,94

Abstandstabelle 8h Autonomie, ohne Linsen - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,01	7,66	7,33	6,99	2,85
2,50	3,16	8,22	7,94	7,69	2,99
3,00	3,39	8,65	8,42	8,18	3,05
3,50	3,65	8,92	8,68	8,45	2,99
4,00	2,84	9,30	8,92	8,61	2,88
5,00	2,28	8,32	8,40	8,44	2,28

Abstandstabelle Autonomie 1h 3h, Runde-Linsen (NLLSYSR4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,37	9,66	9,51	9,32	4,21
2,50	5,15	11,36	11,13	10,85	4,99
3,00	5,87	12,86	12,67	12,47	5,68
3,50	6,53	14,47	14,25	14,01	6,31
4,00	7,12	15,95	15,70	15,44	6,80
5,00	7,05	18,59	18,20	17,85	5,67
6,00	1,14	15,89	15,49	15,18	1,16

Abstandstabelle Autonomie 1h 3h, Spot-Linsen (NLLSYSS4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	1,84	4,46	4,46	4,46	1,84
2,50	2,30	5,58	5,58	5,58	2,30
3,00	2,77	6,70	6,70	6,70	2,77
3,50	3,12	7,40	7,40	7,40	3,12
4,00	3,34	7,82	7,82	7,82	3,34
5,00	3,87	8,87	8,87	8,87	3,87
6,00	4,29	9,85	9,85	9,85	4,29
7,00	4,68	10,90	10,90	10,90	4,68
8,00	5,00	11,78	11,78	11,78	5,00
9,00	5,23	12,53	12,53	12,53	12,53
10,00	5,38	13,31	13,31	13,31	5,38
12,00	5,43	14,50	14,50	14,50	5,43
14,00	5,21	15,19	15,19	15,19	5,21
16,00	4,72	15,39	15,39	15,39	4,72

Abstandstabelle Autonomie 1h 3h Hohe-Flur-Linsen (NLLSYSH4 - separat zu bestellen) - Min. Beleuchtungsstärke auf der Mittellinie: 1lx - Wartungsfaktor 0,8

Montagehöhe [m]					
2,00	4,54	10,47	7,67	4,83	1,79
2,50	5,68	13,09	9,59	6,03	2,24
3,00	6,62	15,30	11,10	6,86	2,51
3,50	7,18	16,77	11,90	7,04	2,48
4,00	7,66	18,12	12,61	7,11	2,42
5,00	8,49	20,41	13,74	7,01	1,92
6,00	9,15	22,30	14,70	6,22	2,03
7,00	9,62	23,92	14,59	5,46	2,14
8,00	9,84	25,29	14,98	5,59	2,16
9,00	10,04	26,48	15,26	5,89	2,26
10,00	10,18	27,27	15,36	6,08	2,31
12,00	9,00	28,11	14,92	6,25	2,24
14,00	7,94	28,22	14,36	6,53	1,96
16,00	5,75	25,97	13,16	6,49	1,40

Artikelen

Omschrijving	Referentie
Emerg.lum. KW clear Autotest 4x1W ERT-LED 3h 230V AC ceil. With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h/8h adjustable, ceiling surface mounting, security luminaire with transparent cover for illumination of escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWC433SC
Optionele toebehoren	
KW Korf balbescherming	NLBKW
Pendelpaar 500mm bedraad wit	NL2PW
Wandbeugel voor KB/ KX/ KW/ KCD/ KE/ GX/ RX wit	NLAWX001
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
Vervanglens LED noodverlichting gangverlichting (4 stuk)	NLLSYSF4
Vervanglens LED noodverlichting gangverlichting (4 stuk)	
Vervanglens LED noodverlichting symmetrisch (4 stuk)	NLLSYSR4
Vervanglens LED noodverlichting symmetrisch (4 stuk)	
Vervanglens noodverlichting spot verlichting (4 stuk)	NLLSYSS4
Voor verlichting van lokalen met hoge plafonds	
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	NLLSYSB4
Vervanglens LED noodverlichting asymmetrisch (4 stuk)	