


Emergency luminaire KW Autotest LED 3h 230V AC wall mount

1h/3h/8h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm




Technische gegevens

Netto lengte (mm)	390,00
Breedte (mm)	93,00
Hoogte (mm)	99,00
Nettogewicht (kg)	0,80
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	Noodverlichting met autotest
Type toestel	Kunststof verlichting
Design	KW
Halogeenvrij	Behuizing van halogeenvrij kunststof
Afwerking	Wit
Detectie afstand (m)	16
Autonomietijd (h)	3

Technische gegevens - vervolg

Lichtmiddel	LED (3W)
Lumen	1h: 300;3h: 300;8h: 120
Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Batterij type (V/Ah)	LiFePO4 2x 3,2V/ 1,6Ah
Beschermingsgraad	IP54
Bevestiging	Wandaanbouw
Omgevingstemperatuur min. (°C)	-5
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Maattekening: Emergency luminaire KW Autotest LED 3h 230V AC wall mount

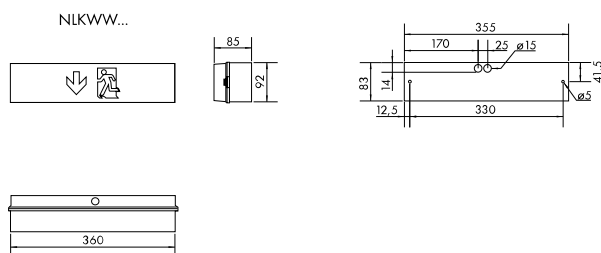

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,31	8,48	7,84	7,17	2,84
2,50	3,46	9,07	8,42	7,75	2,99
3,00	3,52	9,49	8,84	8,17	3,06
3,50	3,51	9,78	9,12	8,46	3,05
4,00	3,41	9,94	9,28	8,62	2,95
5,00	2,90	9,90	9,26	8,60	2,46
6,00	1,60	9,40	8,76	8,14	1,24

Artikelen

Omschrijving	Referentie
Emergency luminaire KW Autotest LED 3h 230V AC wall mount 1h/3h/8h adjustable, wall surface mounting with pictogram on one side, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 300lm; 3h: 300lm; 8h: 120lm	NLKWW403SC
Optionele toebehoren	
KW Korf balbescherming	NLBKW
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L