

Emergency luminaire Linda Industry 30W LED


mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm



Technische gegevens

Netto lengte (mm)	1.570,00
Breedte (mm)	100,00
Hoogte (mm)	110,00
Nettogewicht (kg)	2,80
Type verlichting	Gecombineerde veiligheid en noodverlichting Noodverlichting
Type batterijvoeding	Centrale batterij
Type toestel	Met bewaking en gemengde werking
Productgroep	Kunststof verlichting
Design	LIU
Afwerking	RAL 7035
Lichtmiddel	LED (30W)
Lumen	4760
Nominale spanning (V)	230VAC 50Hz ±20%; 230VDC ±20%
Beschermingsgraad	IP65
Slagvastheid	IK10
Bevestiging	Universeel Wandbevestiging Plafondmontage
Omgevingstemperatuur min. (°C)	-20
Omgevingstemperatuur max. (°C)	35

Dimensions (mm)

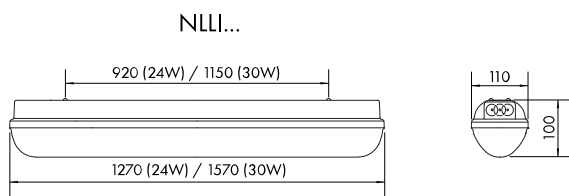

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	4,83	11,72	11,31	11,3	4,61
2,50	5,99	14,54	13,99	13,91	5,66
3,00	7,17	17,39	16,71	16,54	6,72
3,50	8,34	20,23	19,43	19,21	7,79
4,00	9,5	23,05	22,11	21,83	8,85
5,00	11,86	28,72	27,54	26,24	10,6
6,00	12,79	31,32	29,9	28,18	11,3
7,00	13,79	33,45	31,79	29,86	11,87
8,00	14,68	35,36	33,45	31,27	12,33
9,00	15,41	37,3	34,94	32,53	12,71
10,00	15,74	39,23	36,44	33,63	13,03
12,00	16,54	42,62	39,02	35,43	13,47
14,00	17,69	44,47	40,65	36,78	13,68
16,00	18,29	45,56	41,66	37,73	13,59

Artikelen

Omschrijving	Referentie
Emergency luminaire Linda Industry 30W LED mixed mode, single lamp supervision, 230V AC/DC, universal mounting, 4758lm, IP65, 4000K, l=1570, suitable for installation in NLLIU030ML food-production/processing environments (HACCP, IFS, BRC Standard)., 4760lm	
Optionele toebehoren	
Linda Plafond-/ Wandmontagebeugel INOX +/- 90° 18W/36W/58W	LI2JLT0452
Linda Set haken kabelophanging INOX 18W/36W/58W	LI2JLT0463