

# Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling


Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m



## Technische gegevens

|                                |                                            |
|--------------------------------|--------------------------------------------|
| Netto lengte (mm)              | 222,00                                     |
| Hoogte (mm)                    | 127,00                                     |
| Diepte (mm)                    | 40,00                                      |
| Nettogewicht (kg)              | 0,20                                       |
| Type verlichting               | Noodverlichting                            |
| Type batterijvoeding           | Centrale batterij                          |
| Type toestel                   | Met bewaking en centrale bediening         |
| Uitvoering                     | Ring licht                                 |
| Design                         | OM                                         |
| Halogeenvrij                   | Behuizing van halogeenvrij kunststof       |
| Afwerking                      | Aluminium geanodiseerd                     |
| Detectie afstand (m)           | 20                                         |
| Lichtmiddel                    | OLED                                       |
| Spanningsbereik (V)            | 230VAC 50Hz $\pm 20\%$ ; 230VDC $\pm 20\%$ |
| Beschermingsgraad              | IP20                                       |
| Bevestiging                    | Pendelinbouw                               |
| Omgevingstemperatuur min. (°C) | 0                                          |
| Omgevingstemperatuur max. (°C) | 40                                         |
| AA Klasse E 8101               | AA5                                        |

## Dimensions (mm)

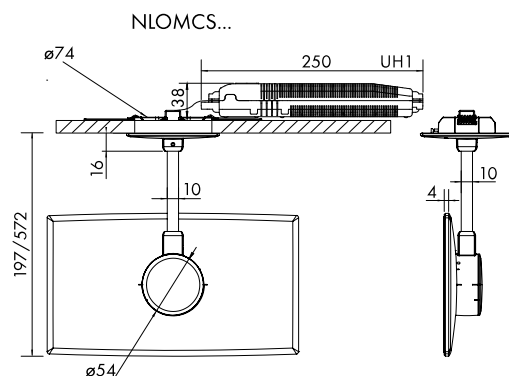

## Artikelen

| Omschrijving                                                                                                                                                                                                                                                      | Referentie |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire OM OLED 230V AC/DC ML one sided ceiling<br>Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m | NLOMCS009M |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                                       |            |
| Pendant for Design OM, 500 mm aluminium, prewired<br>can be shortened according to requirements                                                                                                                                                                   | NLOM1PA    |