

# Emergency luminaire ZA Wireless LED 3h 230V AC

Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type




## Technische gegevens

|                       |                              |
|-----------------------|------------------------------|
| Netto lengte (mm)     | 315,00                       |
| Hoogte (mm)           | 140,00                       |
| Diepte (mm)           | 65,00                        |
| Nettogewicht (kg)     | 2,20                         |
| Type verlichting      | Noodverlichting              |
| Type batterijvoeding  | Autonome batterij            |
| Type toestel          | WirelessControl Professional |
| Productgroep          | Verlichting metaal           |
| Design                | ZA                           |
| Afwerking             | Antraciet                    |
| Autonomietijd (h)     | 3                            |
| Lichtmiddel           | LED (2W)                     |
| Lumen                 | 170                          |
| Nominale spanning (V) | 230VAC 50Hz ±20%             |
| Continu vermogen (W)  | 3,90                         |
| Standby vermogen (W)  | 1,50                         |
| Maximaal vermogen (W) | 5,30                         |
| Type batterij (V/Ah)  | LiFePO4 3,2V/ 3,0Ah          |
| Beschermingsgraad     | IP65                         |
| Slagvastheid          | IK08                         |


## Technische gegevens - vervolg

|                                |                 |
|--------------------------------|-----------------|
| Bevestiging                    | Wandbevestiging |
| Omgevingstemperatuur min. (°C) | -5              |
| Omgevingstemperatuur max. (°C) | 40              |
| AA Klasse E 8101               | AA4             |
| Leverancier                    | Schrack         |

## Dimensions (mm)

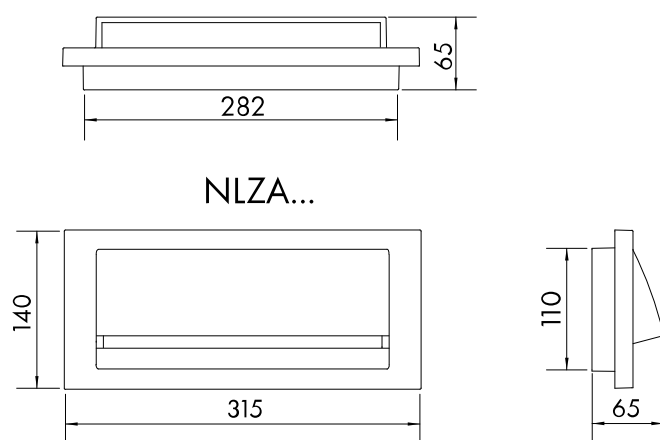

## Drilling distances (mm)

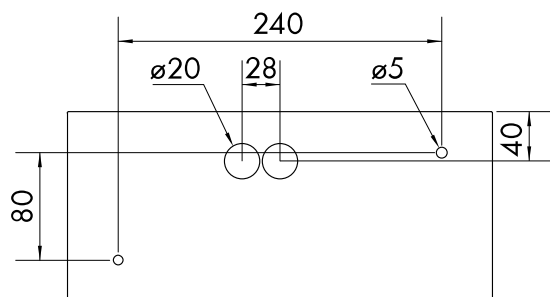

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 0,21                                                                              | 3,13                                                                              | 0,58                                                                              | 9,43                                                                                | 3,89                                                                                |
| 2,50                                                                              | 0,18                                                                              | 3,34                                                                              | 0,58                                                                              | 10,51                                                                               | 4,14                                                                                |
| 3,00                                                                              | 0,16                                                                              | 3,44                                                                              | 0,57                                                                              | 11,28                                                                               | 3,18                                                                                |
| 3,50                                                                              | 0,11                                                                              | 3,47                                                                              | 0,55                                                                              | 11,3                                                                                | 2,79                                                                                |
| 4,00                                                                              | 0,03                                                                              | 3,45                                                                              | 0,53                                                                              | 10,71                                                                               | 1,97                                                                                |

## Artikelen

| Omschrijving                                                                                                                                                                                                                                  | Referentie |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire ZA Wireless LED 3h 230V AC<br>Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type | NLZAA003WL |
| <b>Optionele toebehoren</b>                                                                                                                                                                                                                   |            |
| Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW<br>Vervangbatterij noodverlichting                                                                                                                                                    | NLAKKU3230 |