

Technische Fiche: NLZAAT03WB

ZA Noodverlichting WirelessConnect 4x 0,5W Power LED 3h

Zinc die-cast, anthracite, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, wall mounting, with Bluetooth communication, 190lm




Technische gegevens

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect lage temperatuur
Productgroep	Verlichting metaal
Design	ZA
Afwerking	RAL 7016
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	190


Technische gegevens - vervolg

Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4-TT 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-25
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack

Dimensions (mm)

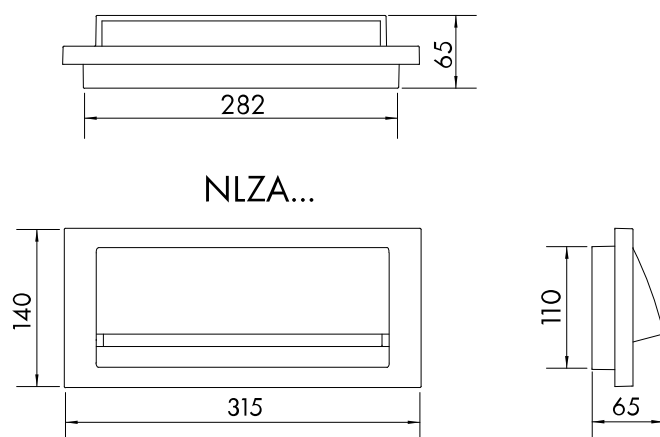

Drilling distances (mm)

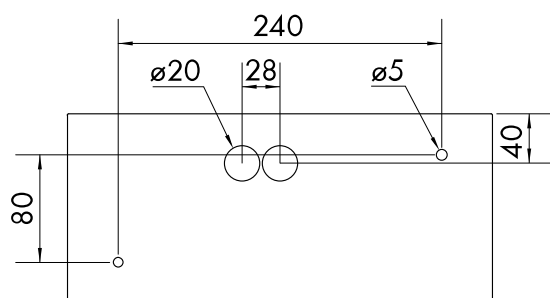

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Artikelen

Omschrijving	Referentie
ZA Noodverlichting WirelessConnect 4x 0,5W Power LED 3h Zinc die-cast, anthracite, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, wall mounting, with Bluetooth communication, 190lm	NLZAAT03WB
Optionele toebehoren	
Batterij LiFePO4 3.2V 3.3Ah lage temperatuur LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T