


Technische Fiche: NLZAAT03WL

Emergency luminaire ZA WL LED 3h 230V AC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, radio switchable, 190lm, WirelessControl Professional type




Technische gegevens

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessControl lage temperatuur
Productgroep	Verlichting metaal
Design	ZA
Afwerking	RAL 7016
Autonomietijd (h)	3
Lichtmiddel	LED (2W)
Lumen	190
Nominale spanning (V)	230VAC 50Hz ±20%


Technische gegevens - vervolg

Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4-TT 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. (°C)	-25
Omgevingstemperatuur max. (°C)	40
AA Klasse E 8101	AA3 AA4 AA5
Leverancier	Schrack

Dimensions (mm)

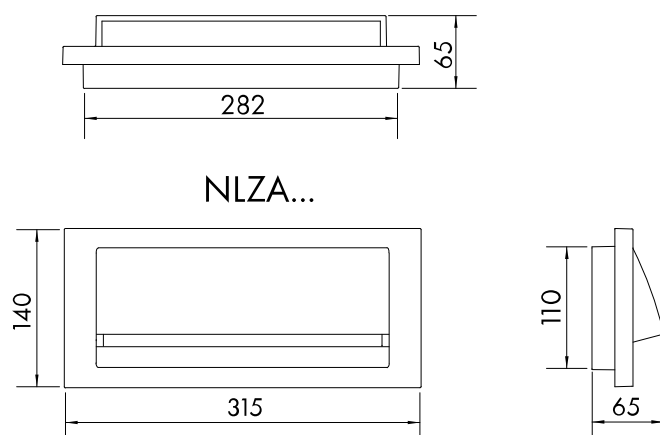

Drilling distances (mm)

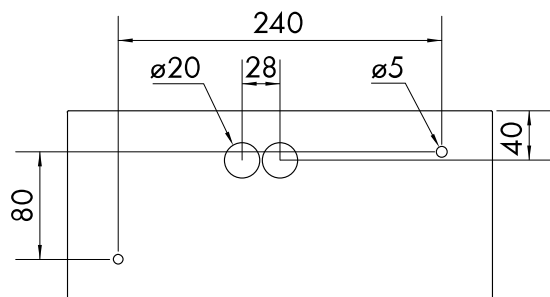

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Artikelen

Omschrijving	Referentie
Emergency luminaire ZA WL LED 3h 230V AC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery suitable for low temperatures, wall mounting, radio switchable, 190lm, WirelessControl Professional type	NLZAAT03WL
Optionele toebehoren	
Batterij LiFePO4 3.2V 3.3Ah lage temperatuur LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T