

Technische Fiche: NLZAW008WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall-mounted, with LiFePO₄ battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm




Technische gegevens

Netto lengte (mm)	315,00
Hoogte (mm)	140,00
Diepte (mm)	65,00
Nettogewicht (kg)	2,20
Type verlichting	Noodverlichting
Type batterijvoeding	Autonome batterij
Type toestel	WirelessConnect
Productgroep	Verlichting metaal
Design	ZA
Afwerking	RAL 9003
Autonomietijd (h)	8
Lichtmiddel	LED (2W)
Lumen	85


Technische gegevens - vervolg

Nominale spanning (V)	230VAC 50Hz $\pm 20\%$
Continu vermogen (W)	3,90
Standby vermogen (W)	1,50
Maximaal vermogen (W)	5,30
Type batterij (V/Ah)	LiFePO4 3,2V/ 3,3Ah
Beschermingsgraad	IP65
Slagvastheid	IK08
Bevestiging	Wandbevestiging
Omgevingstemperatuur min. ($^{\circ}\text{C}$)	-5
Omgevingstemperatuur max. ($^{\circ}\text{C}$)	40
AA Klasse E 8101	AA4
Leverancier	Schrack

Abmessungen (mm)

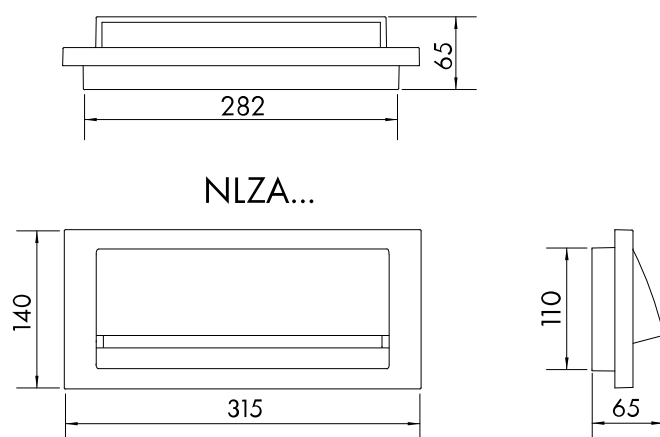

Bohrabstände (mm)

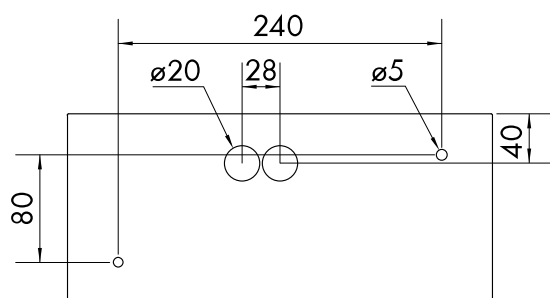

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,11	2,3	0,56	7,51	2,07
2,50	0,05	2,31	0,54	7,16	1,8

Artikelen

Omschrijving	Referentie
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect	
Wall-mounted, with LiFePO4 battery, emergency luminaire for illuminating round surfaces, with Bluetooth communication, 85lm	NLZAW008WB
Optionele toebehoren	
Batterij LiFePO4 3,2V 3,3Ah voor KM, KSC, KMB, ASM, ZAW	
Vervangbatterij noodverlichting	NLAKKU3230