


Technische Fiche: SR1D14781S

# SORAX Glassdoor IP54, W=800xH=2.220mm, RAL7035

Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever

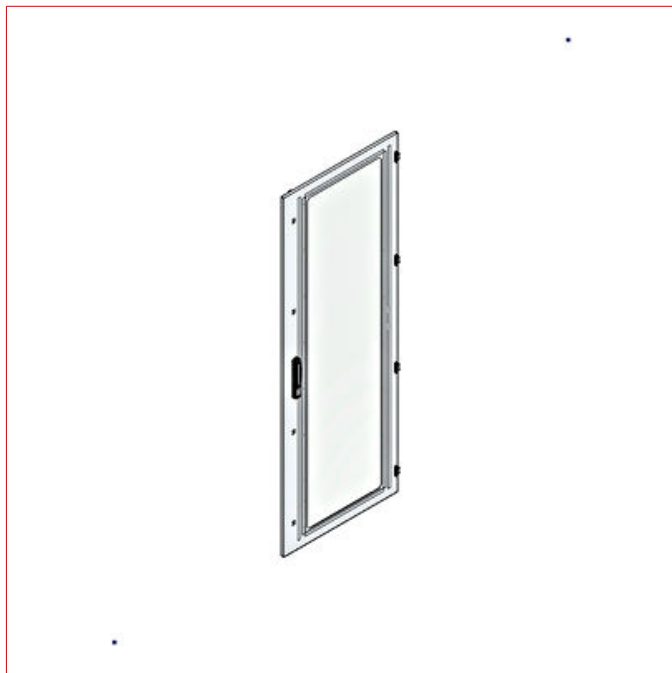

## Productinformatie

- Glassdoor
- IP54
- foamed seal
- security glass
- visible surface 565x2000mm
- swivelling handle with rod lock
- Three-point locking
- opening angle of the door 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for clean cable routing
- RAL7035


## Technische gegevens

|              |          |
|--------------|----------|
| Breedte (mm) | 800,00   |
| Hoogte (mm)  | 2.200,00 |

## Technische gegevens - vervolg

|                   |               |
|-------------------|---------------|
| Diepte (mm)       | 25,00         |
| EAN CODE          | 9004840997255 |
| Adviesprijs       | 545,80        |
| Afwerking         | RAL 7035      |
| Beschermingsgraad | IP54          |
| Type product      | Zichtdeur     |

## Maattekening: SORAX Glassdoor IP54, W=800xH=2.220mm, RAL7035

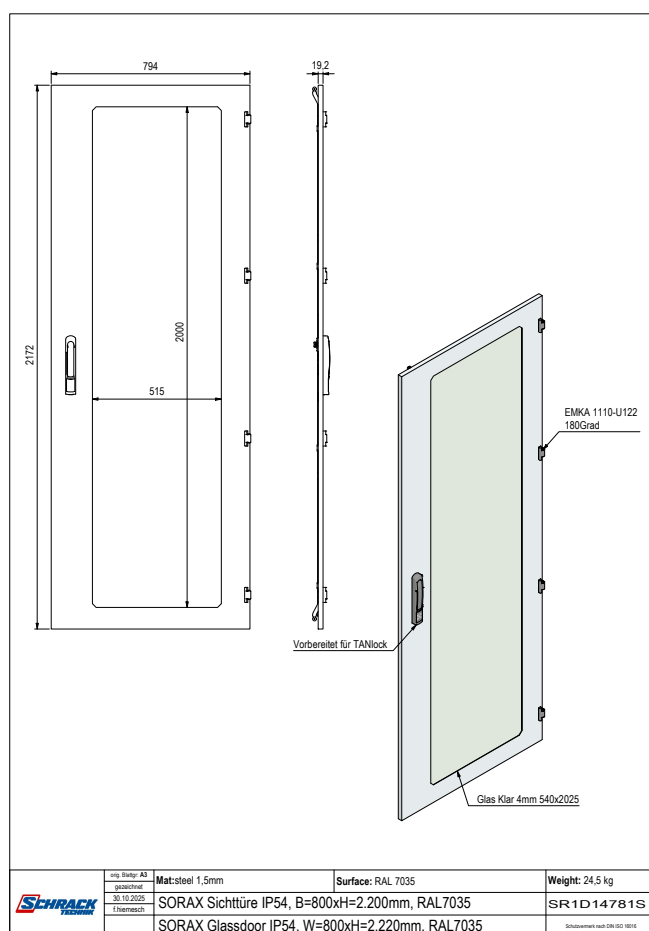

| Omschrijving                                                                                 | Referentie |
|----------------------------------------------------------------------------------------------|------------|
| SORAX Glassdoor IP54, W=800xH=2.220mm, RAL7035                                               | SR1D14781S |
| Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever |            |